

Head Office and Essex 020 8500 9888
email info@capitalofficepartitioning.co.uk



system 6000
75mm/100mm performance partitioning systems

SAS system 6000

System description

SAS System 6000 is a nominal 75mm (3") and 100mm (4") relocatable partitioning system that provides both fire and acoustic performance. It is available in any combination of solid, fully glazed or part glazed elevations with a square or radiused profile.

Comprising a galvanised steel stud framework with aluminium profiles and cover trims, it can be installed as single offset or double glazed or faced with either single or double layers of 12.5mm thick gypsum plasterboard.

Door frames are supplied as manufactured kits for rapid on-site fitting with a range of integrating doors available.

The overall thickness of the system is 95mm and 120mm, with all extruded aluminium profiles available as polyester powder-coated to a range of colours.

Prices for System 6000 are available on request.

System benefits

- Acoustic & fire performance options up to FD30
- Single or double glazed available
- Flexible & easy to install
- Choice of joints and detailing
- Integral blinds & manifestation options





Acoustic Performance Summary

	Acoustic Performance
Solid	up to 43dB
Single Offset Glazed	up to 34dB
Double Glazed	up to 39dB

Fire Performance Summary

	Fire Performance
Solid	up to FD30
Single Offset Glazed	up to FD30
Double Glazed	up to FD30



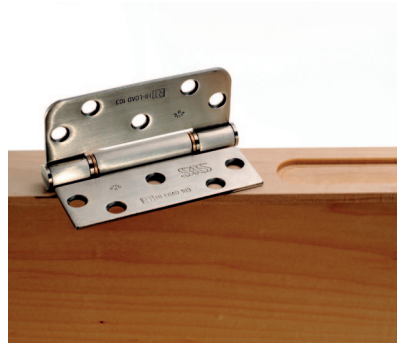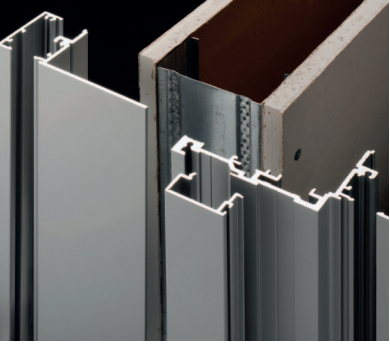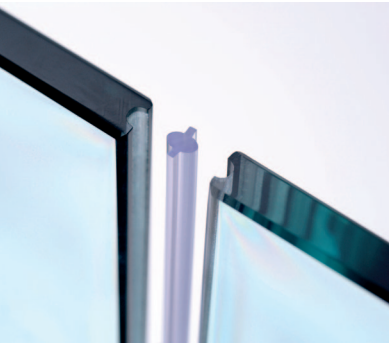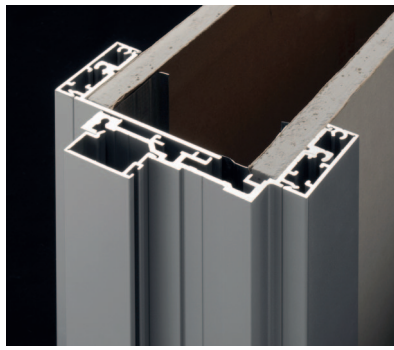

Head Office and Essex 020 8500 9888
email info@capitalofficepartitioning.co.uk